



FEATURES

- No calibration required for oxygen
- Self-calibrating CO2 sensor
- Two local backlit concentration displays- one each for O2 and CO2
- Built-in visual LED alarm indicators
- Two 4-20 mA output signals with dedicated circuits
- Two alarm level set-points for both O2 and CO2
- Two relays for both O2 and CO2
- No drift due to environmental or temperature changes
- 3-year warranty
- Built-in Flow Sample Pump
- NEMA 4X/IP67 Enclosure

Why choose PureAire?

PureAire Monitoring Systems, Inc. is an industry leader in oxygen monitoring and gas detection. For over 25 years, we have dedicated ourselves to the safety of our clients, and the customers they serve, by manufacturing monitors that are long-lasting, accurate, and reliable. PureAire takes pride in providing exceptional customer service along with 24/7 availability to their technical service department.

Why a Water-Resistant Sample Draw Dual O2/CO2 Monitor?

The Water-Resistant Sample Draw Dual O2/CO2 Monitor is designed for continuous, remote sampling where low oxygen levels and high levels of carbon dioxide pose a hazard to personnel. The NEMA 4X/IP67 water-resistant enclosure keeps the electronics dry in wet, humid environments and locations requiring daily wash downs.

What gases can be detected with a Water-Resistant Sample Draw Dual O2/CO2 Monitor?

PureAire's Water-Resistant Sample Draw Dual O2/CO2 Monitor continuously measures oxygen and carbon dioxide levels in an ambient atmosphere where inert gases, including nitrogen, argon, helium, and carbon dioxide are used.

Easy to Use

Secure the monitor to the wall so the display is visible, and connect the monitor to a 24VDC 300mA power source. The monitor will begin sampling O2/CO2 levels after a brief startup period. O2/CO2 levels are displayed clearly on the screen for easy access and visibility.

Water-Resistant Sample Draw Dual Oxygen (0-25%)/Carbon Dioxide (0-50,000 ppm) Monitor

ITEM #: 99230

Product Summary

The Water-Resistant Sample Draw Dual O2/CO2 Monitor is a self-contained system that is designed for continuous monitoring of inert gases in confined spaces. The monitor can sample O2/CO2 levels from up to 100 feet away and is ideal for facilities that use inert gases including, but not limited to, nitrogen, helium, and argon. The NEMA 4X/IP67 dust and water-tight enclosure protects the monitor against dust, water, and damage from external ice formation. The O2/CO2 monitor is perfect for environments such as breweries, bottling plants, food processing facilities, and laboratories or any locations requiring daily wash downs. The monitor will remain accurate at temperatures as low as 5 C. PureAire's durable, non-depleting, zirconium oxide sensor cells, and NDIR cells, will last up to 10+years in a normal environment, without needing to be replaced.

Facilities That Need This Product

- Laboratories
- Agricultural Grow Facilities
- Breweries and Bottling Plants
- Biomedical
- Food Processing
- Flash Freezing Tunnels
- Freezers

Top Advantages of Oxygen Deficiency Monitor






Water-Resistant Sample Draw Dual Oxygen/Carbon Dioxide Monitor

PureAire's Water-Resistant Sample Draw Dual O₂/CO₂ Monitor comes with 2 adjustable alarm setpoints for both O₂ and CO₂ that can connect to a horn/strobe, ex-haust fan, 8 channel controller, remote display, or into building systems. Alarm signals also can tie into automatic shut-off valves when oxygen levels fall below the OSHA threshold.



Easy To Use

PureAire's Water-Resistant Sample Draw Dual O₂/CO₂ Monitor provides constant monitoring with little to no adjustments, saving you time and money while allowing the monitor to operate seamlessly. Our quality sensors make this the longest lasting monitor on the market.

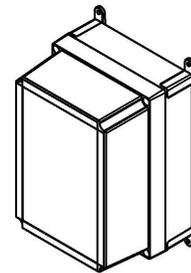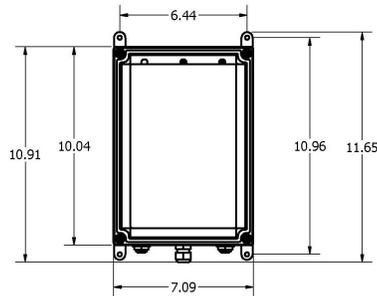

Top Accessories



**8 Channel Programmable
Controller for O₂ or Gas
Monitors**

ITEM #: 99196



Remote Digital Display

ITEM #: 99091 - O₂
ITEM #: 99193 - CO₂



Red Horn/Strobe

ITEM #: 42002



1-888-788-8050

info@pureaire.net
pureairemonitoring.com

1140 Ensell Road
Lake Zurich, IL 60047
1-847-726-6000