

ABT-HC-UCFS-0220M

Images



Product Description

The General Purpose Free Standing Undercounter Freezers are intended for general purpose applications only where precise temperature control and maintenance are not essential and there are no requirements for temperature alarms.

Freestanding models ("UCFS") require 4" of clearance around back and sides of the unit for proper ventilation. Improper installation will void the warranty and will lead to temperature maintenance issues, overheating and possible failure.

Environmentally friendly, natural hydrocarbon (HC) refrigerants (not containing hydrofluorocarbons) vastly reduce global-warming potential (GWP) while meeting new EPA/SNAP mandates and UL, ASHRAE compliance guidelines.

General Description and Application

| | |
|---------------------------------|--|
| Storage capacity (cu. ft) | 1.5 |
| Door | One solid swing door, right hinged |
| Shelves | 1 fixed shelf upper / bottom footed shelf for airflow management |
| Freezer Compartments | 1 |
| Baskets | Non-applicable |
| Mounting | Leveling Legs |
| Interior lighting | Non-applicable |
| Airflow management | Non-applicable |
| External probe access | Rear wall port (3/4" dia.) |
| Insulation | Cabinet is foamed-in-place with EPA compliant high density urethane foam |
| Exterior materials | White powder coated steel |
| Access Control | Keyed Door Lock |
| General warranty | One (1) year parts and labor warranty |
| Product Weight (lbs) | 35 |
| Shipping Weight (lbs) | 40 |
| Rated Amperage | 0.8 Amps |
| Power Plug/Power Cord | NEMA 5-15 Plug, 8-10 ft. typical, conforms to UL471 requirements |
| Facility Electrical Requirement | 110-120V AC: 15 A (minimum) |

Refrigeration System


| | |
|-------------|----------------|
| Refrigerant | R600a |
| Defrost | Manual Defrost |

Controller, Configuration, Alarms and Monitoring

| | |
|---------------------------|--|
| Controller technology | Mechanical Thermostat |
| Average Cycle Temperature | -20°C |
| Disclaimers | Defrosting of the unit will need to be performed periodically to prevent severe ice build-up. Freestanding models ("UCFS") require 4" of clearance around back and sides of the unit for proper ventilation. Improper installation will void the warranty and will lead to temperature maintenance issues, overheating and possible failure. |

Dimensions

| | Width (in.) | Depth (in.) | Height (in.) | Door Swing (in.) | Total open Depth (in.) |
|----------|-------------|-------------|--------------|------------------|------------------------|
| Exterior | 17.5" | 19.5" | 19.25" | 15" | 34.5" |
| Interior | 13" | 13.875" | 13.75" | | |

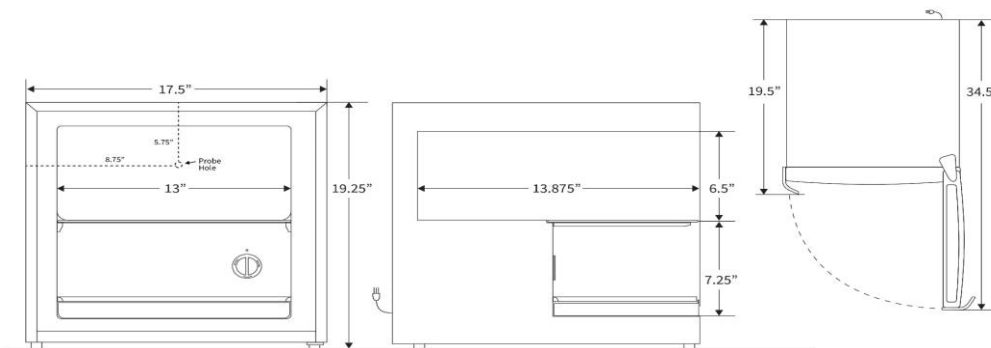

Contact

| | | |
|-------------------|---------------------------------------|--|
| Customer Service | 800-648-4041 Option 3 | customerservice@horizonscientific.com |
| Technical Service | 800-648-4041 Option 5, Parts Option 4 | technicalservice@horizonscientific.com |