

ColdVision CV-LS LED Light Source

for machine vision applications



CV-LS® Light Source A20980

The CV-LS light source is the flagship of the SCHOTT ColdVision series, offering high efficiency output in a compact footprint with versatile connectivity. This connectivity makes it ideal for machine vision applications, while the high brightness LED light engine greatly increases light output – far beyond 150 W EKE halogen lamp levels for the cool white model.

Features:

- Internal light feedback stabilization.
- Fast triggered strobe (25µs rise time, 1µs precision).
- Analog and digital remote control: USB (Virtual RS232), RS232, Dual Ethernet, Mutliport-Wide range power supply according to international standards.
- Cool White, Warm White, and RGBW models are available.

Advantages:

- All connectors come with retention mechanisms.
- High resistance to vibration and shock.
- ESD immunity.
- Maintenance-free LED engine with 50,000 operating hours.

Part No. ¹	Color	Wavelength CCT	Light Output ²
A20980/6000K	Cool White	6000K	1350lm
A20980/3000k	Warm White	3000K	900lm
A20980/RGBW	Red Ch.	625K	130lm
	Green Ch.	530K	250lm
	Blue Ch.	460K	70lm
	White Ch.	6300K	400lm

Electrical Specification	
Power Input	24VDC / 5A Max (18-28VDC)
Power Consumption	120W

Mechanical Specification	
Dimensions (W x D x H)	5.08" x 7.93" x 2.35" (129mm x 201mm x 59,69mm)
Weight	1.8 lbs. (0,816 kg)

Environmental Specification	
Operational Temperature	32°F – 113°F (0°C – 45°C)
Operational Humidity	5% to 95% Non-Condensing
Storage Temperature	-13°F – 185°F (-25°C – 85°C)


Illumination Data ² (Cool White Model)	
Luminous Flux (Default Settings)	1100 lm
Luminous Flux (Max Output)	1350 lm
Color Rendering Index	75

Certification	
Marking	
European Directives	2006/95/EC (Low Voltage Directive) 2004/108/EC (EMC Directive) 2011/65/EU (RoHS)
EMC	IEC 61326-1:2012 FCC CFR47 Part 15B:2015 Japan Deviations
Safety	CENELEC EN 61010-1:2010 UL 61010-1:2012 CAN/CSAC22.2#61010-1:2004
Photo-biological	IEC 62471:2006


1) Full part numbers will also specify power supply cord type.
2) Measured using a SCHOTT fiber optic light guide, Ø 13 mm active, length 1 m (A08051.40 bundle), 23C ambient, typical output




Dimensions

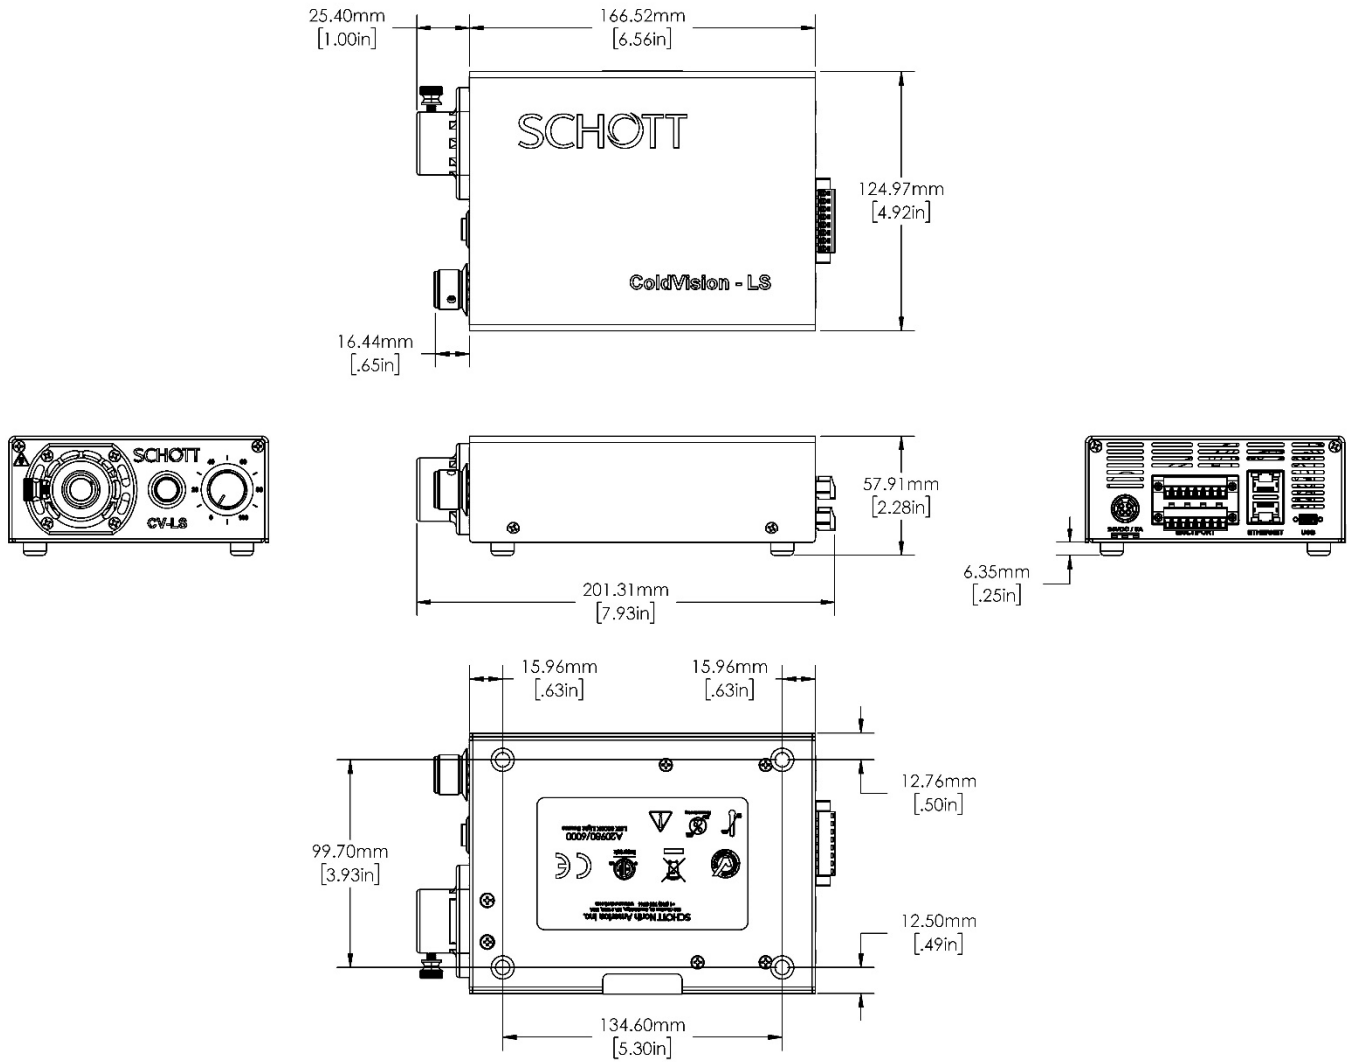

Relative Optical Spectrum of CV-LS vs Halogen Light Sources

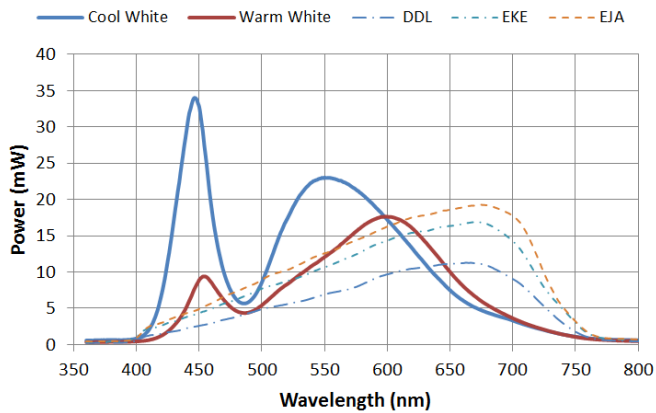

RGBW Optical Spectrum

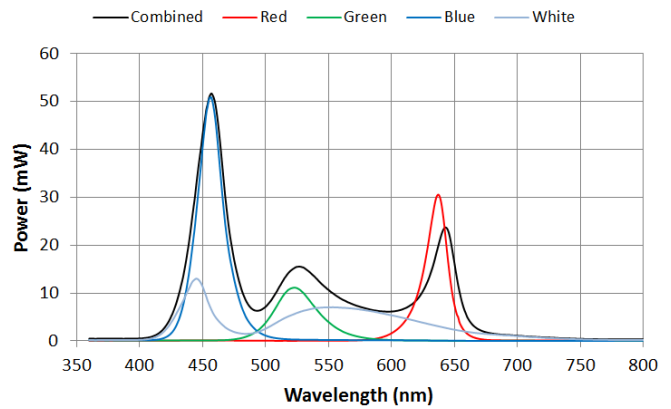

All specifications are subject to change without prior notice. This datasheet or any extracts thereof may only be used in other publications with express permission of SCHOTT. © SCHOTT North America, Inc.

Lighting and Imaging
SCHOTT North America, Inc.
 122 Charlton Street
 Southbridge, MA 01550
 USA
 Phone: +1 (508) 765-9744
 Fax: +1 (508) 765-1299
 liahtin@schott.com

