


YOUR DATA, ANYWHERE, ANYTIME

External Power Lost: Lab fridge  
Check Device [https://  
logtagonline.com](https://logtagonline.com)

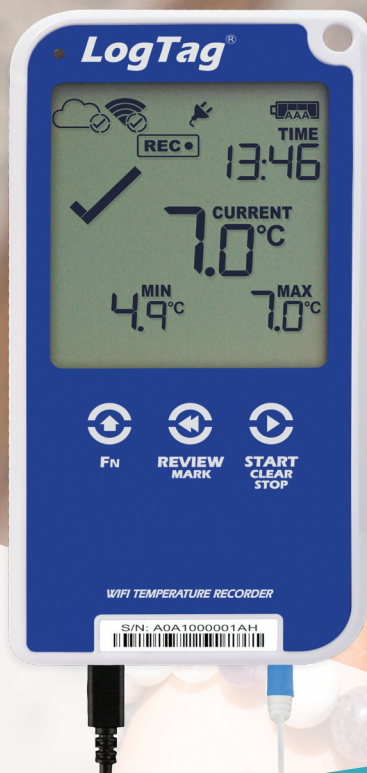

**LogTag**<sup>®</sup>

**UTRED30-WiFi**  
30 Day WiFi Logger with Display




The LogTag® UTRED30-WiFi temperature data logger automatically uploads real-time temperature data to your LogTag® Online cloud account via your existing wireless network.


It features a large, easy-to-read display, along with many familiar attributes known from the LogTag® family of data loggers.

These include non-volatile memory for up to 16,129 temperature readings and a statistical memory, storing maximum and minimum reading as well as alarm duration for each of the last 30 days.


## Accessories




**2x AAA Batteries**  
Not Included



**USB Cable**  
Included



**AC Adapter**  
Not Included



**Wall Mount**  
Not Included



**Glycol Buffer**  
Not Included



**External Probe**  
Not Included. (Required)

Sensors are available with a 1.5m or 3m cable.  
E.g. ST100J-15 for 1.5m or ST100J-30 for 3m cable.

Compatible probes below:

<b>ST100J</b>	40mm tip length, ø3.2mm.
<b>ST100K</b>	65mm tip length, ø3.2mm.
<b>ST100L</b>	90mm tip length, ø3.2mm.
<b>ST100S</b>	30mm tip length, ø5mm.
<b>ST100T</b>	140mm tip length, ø5mm.
<b>ST100H</b>	Handled with 105mm tip length, ø5mm.
<b>ST100B</b>	Untipped (bare sensor).
<b>STX50</b>	5 Meter extension cable for ST10/ST100 sensors.

# Features

---



Real-time data automatically uploaded via WiFi to the LogTag Online cloud.



Download data via LogTag Analyzer or as a PDF (no software required) when WiFi is unavailable.



Read current temperature and latest Min-Max temperature at a glance.




Check and reset Min-Max temperature reading at any time.



Audible alarm and flashing red LED signals a temperature alarm.



View alarm status for up to 30 days at a glance.



Can be powered by 2x AAA batteries (user replaceable) if not external powered.



Measure and store up to 16,000 readings – enough for 67 days at 6 minute logging.



Auto-pause function suspends alarm & statistic processing when the external sensor is unplugged.



Second battery backup via a coin cell to ensure no data is lost.

# Applications



**Pharmaceutical**



**Medical & Healthcare**



**Cold Storage & Warehousing**

# Specifications

<b>Product Model</b>	UTRED30-WIFI.
<b>Sensor Measurement Range</b>	-40°C to +99°C (-40°F to +210°F).
<b>Operating Temperature Range</b>	-30°C to +60°C (-22°F to +140°F).
<b>Storage Temperature Range</b>	-10 °C to +40 °C (32 °F to +104 °F).
<b>Rated Temperature Reading Resolution</b>	0.1°C or 0.1°F.
<b>Rated Temperature Reading Accuracy</b>	Better than ±0.5°C (±0.9°F) for -20°C to +40°C (-4°F to +104°F), typically ±0.3°C (0.6°F). Better than ±0.8°C (±1.4°F) for -40°C to -20°C (-40°F to -4°F), typically ±0.5°C (0.9°F). Better than ±0.8°C (±1.4°F) for +40°C to +70°C (+104°F to +158°F), typically ±0.7°C (1.3°F). Better than ±1.2°C (±2.2°F) for +70°C to +99°C (+158°F to +210°F), typically ±1°C (1.8°F).
<b>Recording Capacity</b>	16,129 temperature readings. 67 days at 6 minute logging. Day summary statistics memory (for display on LCD): up to 30 days of Min/Max/duration and alarm trigger statistics.
<b>Sampling Interval</b>	Configurable from 30 seconds to 18 hours.
<b>Logging Start Options</b>	Push button start (with configurable start delay from 1 minute to 72 hours) or specific date & time.
<b>Download Time</b>	Typically with full memory (16,129 readings) in less than 10 seconds.
<b>Environmental</b>	IP51 (when vertically mounted or hung with USB dust-cap in place).
<b>Calibration</b>	Factory calibrated using NIST equivalent reference equipment. Calibration certificate available on request.
<b>Power Source</b>	5V via micro USB socket or, 2 x 1.5V AAA batteries. CR2032 LiMnO <sub>2</sub> coin cell (backup logging function only).
<b>Battery Life</b>	Device should normally be powered via USB. AAA batteries provide backup power for up to 2 months.
<b>Connection Interface</b>	USB 2.0 / Micro-USB plug.
<b>WiFi</b>	IEEE 802.11 / WPA/WPA2 security.
<b>Size</b>	141mm(H) x 72mm(W) x 18mm(T).
<b>Weight</b>	158g with AAA batteries, (134g - excluding probe and AAA batteries).
<b>Case Material</b>	Polycarbonate.



# Connection Software

Real-time data automatically uploaded via WiFi to the LogTag Online cloud.

For more information on LogTag Online, please visit our website:

[logtagrecorders.com/online](http://logtagrecorders.com/online)

