

New sensor: Radwag MonoBLOCK™
Unrivalled repeatability
Weighing heavy loads with the maximum accuracy



RADWAG MONOBLOCK®

www.radwag.com

PM

**High Capacity
Precision Balances**

THE HIGHEST LEVEL OF PERFORMANCE


RADWAG MonoBLOCK™ solution facilitates weighing 10 mg - 50 kg sample weights with the highest accuracy.

Unrivalled Repeatability

PM balances are characterized by the highest measurement accuracy for particular maximum capacities. These instruments guarantee readability of 0.01 g at capacity of 15 kg and readability of 0.1 g at capacity of 50 kg.


RADWAG MONOBLOCK®

The PM series has been equipped with an up to date innovative measuring system RADWAG MonoBLOCK™. Use of brand-new RADWAG-patented technology guarantees stability of repeatability over time at a range $sd < 1d$. The unique measuring system solution is characteristic for great resistance to ambient conditions change.

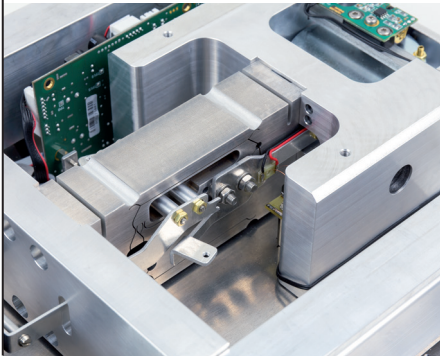


High Quality Design

Housing made of ABS thermoplastic polymer and stainless steel weighing pan effectively protect the weighing sensor and electronics against water, dust and damage. Both the housing and the weighing pan function also as a protection against chemical substances.

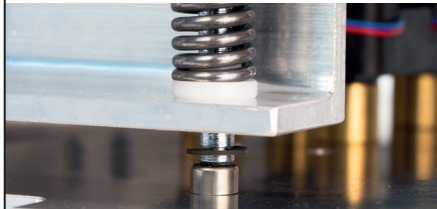

An in-built 4-point protection system prevents balance overloading, this ensures safety in case too heavy load is applied onto the weighing pan. Robust design allows device operation even in the most challenging ambient conditions.

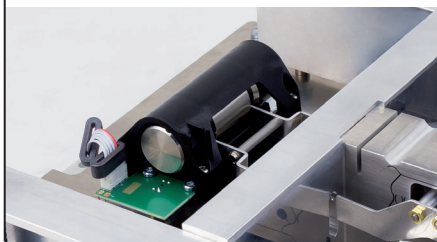

Work Optimisation

Large weighing pan facilitates weighing or dosing of many recipe ingredients using one balance and one container only.



With this process optimisation is guaranteed both in a laboratory and on a production line. Application of one weighing instrument for a number of various purposes considerably reduces costs and improves performance.

Wide Range of Functions and Applications

PM series balances offer plenty of advanced weighing applications improving their functionality.

Wide range of useful functions ensures comfort of operation.



More Than Weighing!

As hi-tech weighing instruments PM balances offer not only regular weighing but also a wide range of professional working modes. Large color screens simplify operation of any working mode making it easy and intuitive.



PM series balances offer good ergonomics, wide range of applications and comfort of operation.

Usage Ergonomics

With use of long cable it is possible to locate the terminal in a place facilitating convenient operation.


The terminal design allows to mount it on a wall at suitable level.



PM series is equipped with only 11-centimetre high weighing platform, the lowest permissible solution for instruments of this class. The unique measuring system solution is characterized with great resistance to ambient conditions change.



communication between the balance and the terminal ensures safe operation of the instrument in a fume cupboard or glove box chamber in the course of weighing of toxic substances (chemicals, poisonous vapour etc.).

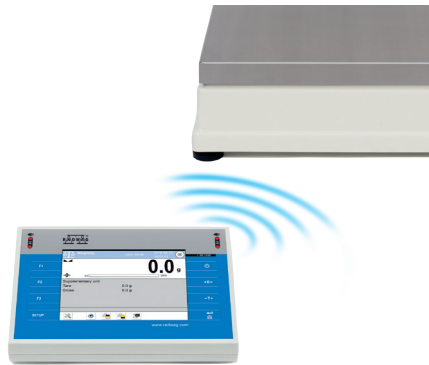

Settings Customization and Accordance with CFR21

Modern weighing terminals used along with PM series balances enable adjusting balance settings to individual requirements of particular operators. Additionally they guarantee data safety and limited access which prevents unauthorized users against entering the balance program.

Large display with clear menu layout offers even more comfortable operation making your work enjoyable like never before.

PM series balances comply with CFR21 standard. This is pioneer solution available on the market that adheres to CFR21 requirements implemented in the balance firmware (4Y series).



Cooperation with External Devices

PM series is equipped with complete range of communication interfaces enabling connection of numerous peripheral devices.



PC Computer



Printer



Keyboard



Additional display



Barcode scanner



Thermo hygro barometer





RFID reader





PLC





Tower lights

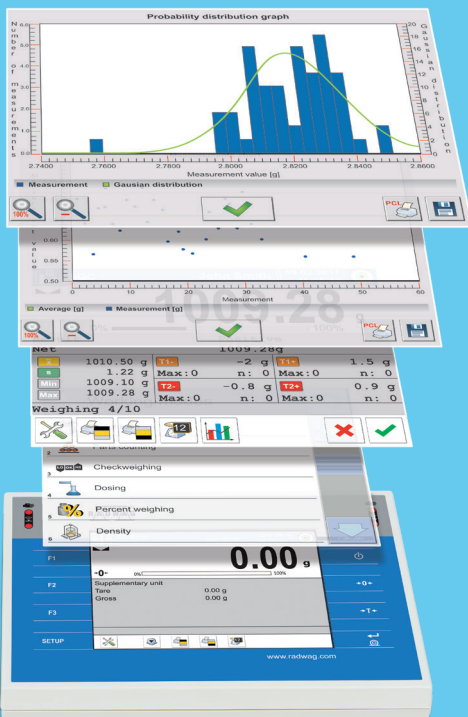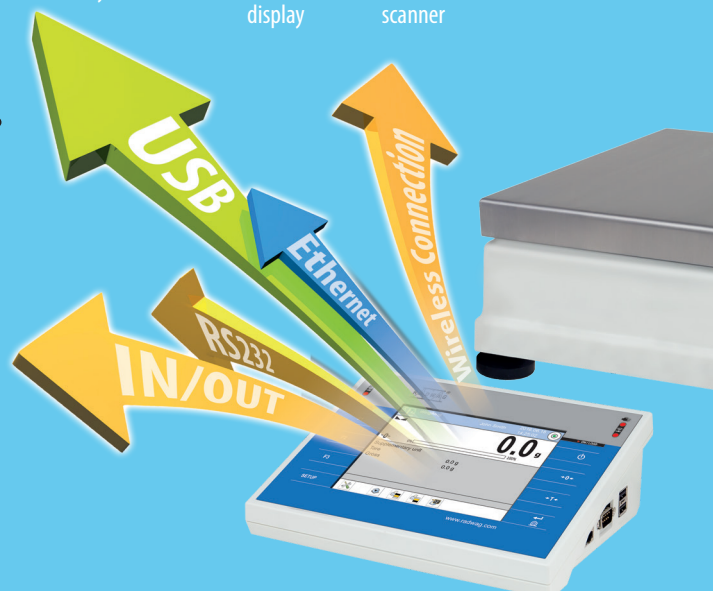

**PM 10.4Y****PM 15.4Y****PM 35.4Y****PM 50.4Y****PM 60.05.4Y****PM 60.1.4Y**

Maximum capacity [Max]	10 kg	15 kg	35 kg	50 kg	60 kg	60 kg
Minimum load	0.5 g	0.5 g	5 g	5 g	–	–
Preload	1 kg	1.5 kg	3.5 kg	5 kg	–	–
Readability [d]	0.01 g	0.01 g	0.1 g	0.1 g	0.5 g	1 g
Tare range	-10 kg	-15 kg	-35 kg	-50 kg	-60 kg	-60 kg
Linearity	±0.03 g	±0.03 g	±0.3 g	±0.3 g	±1.5 g	±3 g
Repeatability (5% Max)*	0.004 g	0.004 g	0.04 g	0.04 g	0.2 g	0.4 g
Repeatability (Max)*	0.01 g	0.015 g	0.1 g	0.15 g	0.4 g	0.8 g
Stabilization time	3 s	3 s	3 s	3 s	3 s	3 s
Minimum weight (U=1%, k=2)	0.82 g	0.82 g	8.2 g	8.2 g	41 g	82 g
Minimum weight USP	8.2 g	8.2 g	82 g	82 g	410 g	820 g
Adjustment	Internal	Internal	Internal	Internal	Internal	Internal
Weighing pan dimension	200 × 185 mm	200 × 185 mm	347 × 260 mm	347 × 260 mm	500 × 400 mm	500 × 400 mm
Display	5.7" colour touch screen	5.7" colour touch screen	5.7" colour touch screen	5.7" colour touch screen	5.7" colour touch screen	5.7" colour touch screen
Interfaces	2×USB-A, 2×RS 232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	2×USB-A, 2×RS 232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	2×USB-A, 2×RS 232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	2×USB-A, 2×RS 232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	2×USB-A, 2×RS 232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	2×USB-A, 2×RS 232, Ethernet, Wi-Fi®, 4×IN, 4×OUT
Working temperature**	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C

* Repeatability is expressed as a standard deviation from 10 weighing cycles | ** Balance maintains parameters in accordance with type approval in temperatures +15 ÷ +35 °C | Wi-Fi® is a registered trademark of Wi-Fi Alliance.

**PM 10.C32****PM 15.C32****PM 25.C32****PM 35.C32****PM 50.C32****PM 60.05.C32****PM 60.1.C32**

Maximum capacity [Max]	10 kg	15 kg	25 kg	35 kg	50 kg	60 kg	60 kg
Minimum load	0.5 g	0.5 g	5 g	5 g	5 g	–	–
Preload	1 kg	1.5 kg	2.5 kg	3.5 kg	5 kg	–	–
Readability [d]	0.01 g	0.01 g	0.1 g	0.1 g	0.1 g	0.5 g	1 g
Tare range	-10 kg	-15 kg	-25 kg	-35 kg	-50 kg	-60 kg	-60 kg
Linearity	±0.03 g	±0.03 g	±0.3 g	±0.3 g	±0.3 g	±1.5 g	±3 g
Repeatability (5% Max)*	0.004 g	0.004 g	0.04 g	0.04 g	0.04 g	0.2 g	0.4 g
Repeatability (Max)*	0.01 g	0.015 g	0.1 g	0.1 g	0.15 g	0.4 g	0.8 g
Stabilization time	3 s	3 s	3 s	3 s	3 s	3 s	3 s
Minimum weight (U=1%, k=2)	0.82 g	0.82 g	8.2 g	8.2 g	8.2 g	41 g	82 g
Minimum weight USP	8.2 g	8.2 g	82 g	82 g	82 g	410 g	820 g
Adjustment	Internal	Internal	Internal	Internal	Internal	Internal	Internal
Weighing pan dimension	200 × 185 mm	200 × 185 mm	347 × 259 mm	347 × 259 mm	347 × 259 mm	500 × 400 mm	500 × 400 mm
Display	5" colour graphic	5" colour graphic	5" colour graphic	5" colour graphic	5" colour graphic	5" colour graphic	5" colour graphic
Interfaces	USB-A, USB-B, 2 × RS232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	USB-A, USB-B, 2 × RS232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	USB-A, USB-B, 2 × RS232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	USB-A, USB-B, 2 × RS232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	USB-A, USB-B, 2 × RS232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	USB-A, USB-B, 2 × RS232, Ethernet, Wi-Fi®, 4×IN, 4×OUT	USB-A, USB-B, 2 × RS232, Ethernet, Wi-Fi®, 4×IN, 4×OUT
Working temperature**	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C

* Repeatability is expressed as a standard deviation from 10 weighing cycles | ** Balance maintains parameters in accordance with type approval in temperatures +15 ÷ +35 °C | Wi-Fi® is a registered trademark of Wi-Fi Alliance.