

ACR1321WNSF456



64.88" x 23.38" x 28.13" (H x W x D)

Upright healthcare all-refrigerator certified to NSF/ANSI 456 with self-closing solid door, front lock, digital controls, and NIST-calibrated temperature readout

Highlights:

Certified to NSF/ANSI 456 Vaccine Storage Standard

Specially designed to meet current CDC/VFC vaccine refrigeration guidelines for convenient storage in pharmacies, medical offices, and other healthcare facilities

Designed and constructed for reliable cold storage in healthcare facilities

Product Features:


EQTemp Healthcare Refrigerator	All-refrigerator designed to operate between 2 and 8°C for a variety of storage application in medical offices and other healthcare facilities	
Certified to NSF/ANSI 456 Vaccine Storage Standard	Tested to comply with the latest standards	
Certificate of calibration included	The temperature monitoring device (TMD) is calibrated to NIST standards in our ISO/IEC 17025:2017 certified calibration laboratory and ships with a 2-year certificate of calibration for your records	
Large capacity	Full 12.71 cu.ft. capacity inside conveniently slim footprint	
High/low temperature alarm	Audible alarm sounds if the interior temperature rises or falls out of set range	
External temperature readout	Includes continuous display of the current interior and high/low temperature, and can be switched from Celsius to Fahrenheit at the touch of a button	
Temperature Range: 2º to 8ºC	Preset to 5°C as recommended for many storage applications	
Fully finished white cabinet	Allows the unit to be used freestanding	
agnetic door gasket Quality door gaskets ensure a tight seal for energy savings and improved performance		




ACR1321WNSF456 Specifications:

Overview		
Height of Cabinet	64.88" (165 cm)	
Width	23.38" (59 cm)	
Width with Door Open	23.63" (60 cm)	
Depth	28.13" (71 cm)	
Depth with door at 90°	50.13" (127 cm)	
Capacity	12.71 cu.ft. (360 L)	
Defrost Type	Automatic	
Door	White	
Cabinet	White	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Sanitation	ETL-S to NSF 456	
Amps	2.0	
Voltage/Frequency	115 V AC/60 Hz	
Weight	130.0 lbs. (59 kg)	
Shipping Weight	212.5 lbs. (96 kg)	
Parts & Labor Warranty	1 Year	
Compressor Warranty	5 Years	
UPC	761101083100	
Refrigerator Features		
Door Swing	RHD	
Reversible	Factory Reversible	
Shelf Type	Wire	
Shelf Qty	5	
Thermostat Type	Digital	
Fan Type	Interior	
Refrigerant Type	R600a	
Refrigerant Amount	2.0oz.	
High Side PSI	1.45	
Low Side PSI	0.85	
Level Legs Qty	2	
Temperature Range	2º to 8ºC	
Sound Level	37.6 dB	
Dimensions		
Interior Height	56.5" (144 cm)	
Interior Width	20.0" (51 cm)	
Interior Depth	21.5" (55 cm)	

-	Compressor Step Height	9.0" (23 cm)
	Compressor Step Width	20.0" (51 cm)
	Compressor Step Depth	8.0" (20 cm)

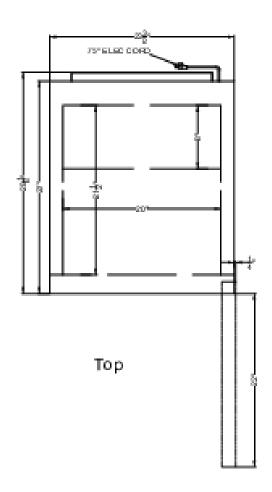



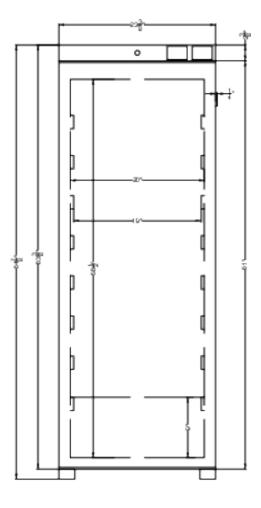

Front