


PTM Drum and Wheelchair Platforms



The PTM platform scale features a low-profile base and integrated ramps on both sides, offering smooth transitions from the floor to the platform. Suitable for use in many settings, the PTM is ideal for checking the weight of wheelchair occupants, and loaded dollies, barrels and drums. Its diamond plate surface provides good grip and a solid, steady weighing area. Handles and wheels enable easy portability in a warehouse or medical facility. Combine the PTM with the GK indicator or AE 403 indicator for a range of features and functions. The GK indicator allows a numeric tare value to be entered, while the AE 403 is IP67 rated for harsh environments.

Low-profile base and ramps for easy-access weighing

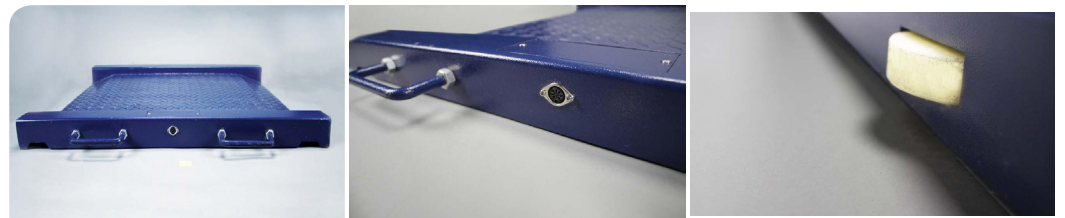

Features

- Adjustable leveling feet help optimize setup
- Built-in ramps on each side enable easy access
- Diamond-plate surface for added grip
- Heavy-duty rubber feet ensure stability of unit
- Integrated wheels permit easy movement
- Three-meter/10-foot load cell cable
- Rugged construction stands up to industrial use
- Ramps allow easy access for wheelchair use

Applications

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Dynamic / animal weighing



AE 403 Indicator



GKa Indicator

About ADAM:

For more than 45 years, professionals worldwide have relied on Adam Equipment for an extensive selection of dependable and affordable weighing equipment. Adam provides the right balance of speed, performance and value.

PTM Drum and Wheelchair Platforms



Model	PTM 500	PTM 500 [GKa]	PTM 500 [AE403]
Capacity	1100lb / 500kg	1100lb / 500kg	1100lb / 500kg
Readability	0.2lb / 0.1kg	0.2lb / 0.1kg	0.2lb / 0.1kg
Repeatability (S.D.)	0.4lb / 0.1kg	0.4lb / 0.1kg	0.4lb / 0.1kg
Linearity (+/-)	0.4lb / 0.2kg	0.4lb / 0.2kg	0.4lb / 0.2kg
Excitation Voltage	5 to 10V		
Loadcells	4		
Pan Size	29.9"x22.8" / 760x580mm		
Weighing Units	N/A	kg, lb, lb:oz, oz, N	g, kg, lb, lb:oz, oz, N, custom unit
Stabilization Time (sec)	2		
Interface	N/A	RS-232	
Calibration	N/A	External calibration	
Display	N/A with 0"/ 0mm -high digits	Backlit LCD with 0.8"/ 20mm -high digits	Backlit LCD with 1.6"/ 40mm -high digits
Power Supply	N/A	12VDC 800mA adapter / Internal rechargeable battery	
Operating Temperature	-10° to 40°C / 14° to 104°F		
Housing	Mild steel base		
Cable Length	10' / 3M		
Overall Dim.	40.2"x31.6"x3" / 1020x803x75mm (wxdxh)		
Net Weight	78.2lb / 35.5kg		

Accessories

Item number	Description
3074010266	RS-232 cable (null-modem)
700400103	RS-232 cable
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
1120014641	AIP impact printer
1120011156	ATP thermal printer
600002028	AdamDU Data Collection Program
2050013351	Indicator stand
700660288	Calibration certificate

Key Accessories



ATP thermal printer

Easy-to-use features combined with quick set-up equals a truly versatile thermal printer. A single push-button feed key and three easy-to-read LED indicators make operation simple.



AdamDU data collection program

Adam DU software connects a balance to the laboratory network, helping to achieve seamless data collection, transfer and analysis. DU features an easy-to-use interface with a main command window, allowing users to quickly collect information from up to eight Adam balances simultaneously using RS-232 or USB connections.

Supplied by

www.adamequipment.com

Adam Equipment follows a policy of continuous improvement and reserves the right to change specification and pricing without notice. Adam Equipment's standard terms and conditions of sale apply. Errors and omissions excepted.
©2019 Adam Equipment NA-9051 11/21/2019