

# Precision Constant Temperature Agitating Water Bath

## BK · BA Series

Operating temperature range

RT+5~80°C

Temperature control accuracy

±0.02°C~±0.07°C


Bath capacity

27L~144L



- BK series - Fixed temperature operation  
BA series - Program operation
- In addition to BK series function, BA series adopted controller with program operation function (1 pattern 30 steps or 2 pattern 15 steps)
- Tank capacity: 27L, 42L, 70L, 109L, 144L
- Extremely high degree of temperature adjustment precision achieved by adopting high-precision thermostat and circulation pump
- Digital display setting and indicated value of temperature and time
- Equipped with observation window
- Optional items include cooling coil, top cover, mounting rack, and viscosity meter support

### Temperature Rising Curve

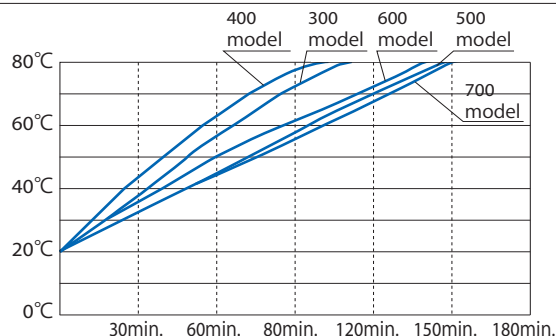

### Control Panel



BK series control panel



BA series control panel

### Specifications

Model	BK300	BA300	BK400	BA400	BK500	BA500	BK610	BA610	BK710	BA710
Stirring method	Stir by pump									
Operating temp. range	RT+5~80°C									
Temp. control accuracy	±0.02~±0.07°C									
Temp. distribution accuracy	±0.3°C									
Max. temp. reaching time	~120min.		~110min.		~165min.		~160min.		~200min. ~160min.	
Interior material	Stainless steel and glass									
Temp. controller	PID control by microprocessor (BK: Fixed temperature operation, BA: Fixed temperature and program operation, 1 pattern 30 steps or 2 pattern 15 steps)									
Sensor	W sensor: Pt resistance thermometer, Pt 100Ω(temp. controller) + K thermocouple (overheat protector)									
Temp. setting / display method	Digital setting / display									
Overheat protector	ON / OFF by microprocessor									
Heater (SUS316)	1.3kW		2.2kW		2.4kW		3.5kW		4.5kW	
Stirring System (Magnet pump)	6W		30W				60W			
Timer	1min.~99Hrs. 59min. to 999Hrs. 50mins, Digital setting, Auto start, Auto stop, Quick auto stop									
Safety device	Self-diagnostic functions (Heater disconnection, SSR short circuit, Abnormal sensor, Over current), Electric leakage breaker, Over heat protector									
Internal dimensions (W x D x H mm)	300×300×300		400×350×300		500×400×350		548×500×400		640×500×450	
External dimensions (W x D x H mm)	490×360×367		590×410×367		690×460×417		738×560×467		830×560×517	
Window dimensions (W x H mm)	240×215		340×215		440×265		340×215		440×265mm	
Bath capacity	~27L		~42L		~70L		~109L		~144L	
Shelf pitch	30mm									
Number of plates	5				6		9		10	
Drain hose	ø15×20mm									
Power source 50/60Hz	AC115V / AC220V						Single phase AC220V			
	12.5 / 6.5A		20A / 10.5A		22A / 11.5A		17.5A		23A	
Weight	~19kg		~25kg		~30kg		~36kg		~46kg	
Included accessories	Shelf plate 1pc., clamp 2pcs., stand 1pc., clamp holder 2pcs., tube connector 1pc., drainage cap 1pc.									

## Optional Items

### Shaking unit


Model	Shaking range	Shaking frequency
BN300	10~30 mm	20~160 rpm



BK400 + BN300

### Mounting rack

Product code	Dimension (W x D x H)	Suitable models
221195	294 x 272 x 148.5mm	BK/BA300
221196	394 x 322 x 148.5mm	BK/BA400
221197	494 x 372 x 148.5mm	BK/BA500

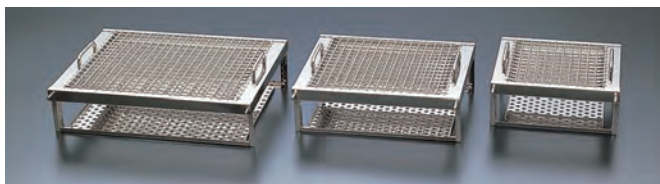

Mounting rack


### Viscosity meter support

Product code	Specification	Suitable models
221189	4 pcs. / bracket	BK/BA300
221183	4 pcs. / bracket	BK/BA400
221184	5 pcs. / bracket	BK/BA500

Able to hold Cannon-Fenske and Ubbelohde viscometer, easy to measure kinematic viscosity.

Base: Stainless steel 304

Holder: Brass nickel plated

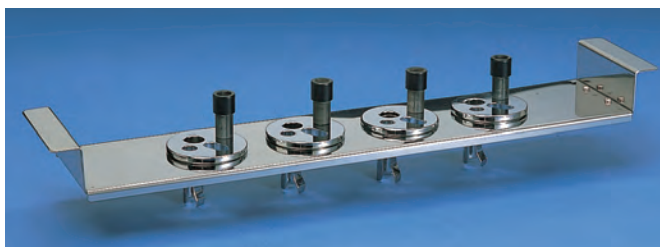

Viscosity meter support

### Water pump

Model	Specification
PT-16	Operating temperature range RT~80°C Lift about 2m, water supply about 9L/min. Dimension: 17mm

Pump water in closed container, which includes distillation column, refractometer and other instruments inside, to continuously circulate and keep warm or warm up liquid.



Water pump

### Cooling coil

Product code	Specification	Suitable models
221182	Copper pipe nickel plating I.D. 8mm x Length 1.8m E.D. 12mm	BK/BA300, 400, 500

Use inside a tank. Cooling water pipe not included.




Cooling coil

### Top cover of water tank (stainless steel)

Product code	Suitable models
221192	BK/BA300
221193	BK/BA400
221194	BK/BA500
221383	BK/BA610
221384	BK/BA710



Top cover for BK/BA300,400,500



Top cover for BK/BA610,710

### Stand with caster

Product code	Suitable models
221385	BK/BA610
221386	BK/BA710