


# Bio Performance

## BP60 Incubator

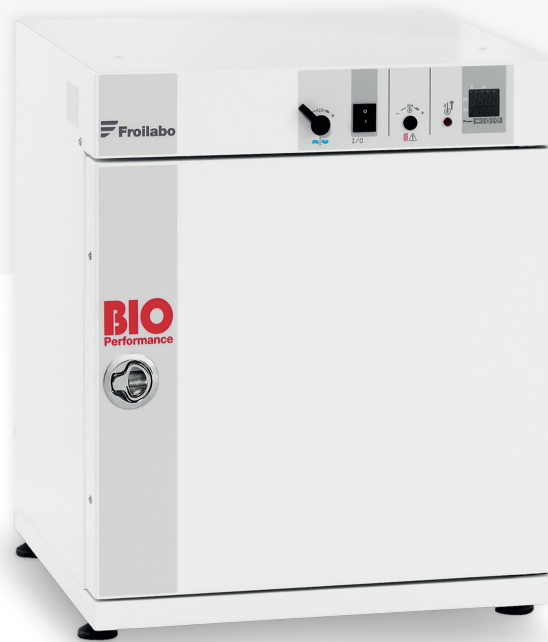

### Precise and Homogenous.

Accurate and durable laboratory incubators with natural or forced convection available with or without refrigeration. Froilabo's range of laboratory incubators provide flexible solutions suited to a variety of applications. Supporting capacities from 60 litres to 1,300 litres they are suitable for large and small laboratories.

#### PERFORMANCE (Ambient temp: 22°C)

Temperature range	+5°C to 100°C
Homogeneity at 37°C	<+/-0.5°C
Temporal stability	<+/-0.1°C

#### WARRANTY

Parts	2 years
-------	---------



### Class II

Overtemperature Safety



### 8 mins

To rise from 18°C to 60°C

# Technical Specifications

## BP60 LABORATORY INCUBATOR

### GENERAL SPECIFICATIONS

Net Volume	58 L
Ext Dimension (W x D x H)	640 x 526 x 579.5 mm / 25.2 x 20.7 x 22.8 in
Int Dimension (W x D x H)	390 x 400 x 356 mm / 15.4 x 15.8 x 14.1 in.
Ext Construction	Electrogalvanised steel with epoxy paint
Int Construction	Brushed stainless steel inner tank
Net Weight	39 kg / 88.2 lb
Standard Construction	1 fully closed door, easy hands-free closure / Safety glass inner doors for better insulation / 1 power cord (1.5m) / 4 levelling feet
Shelves (W x D)	380 x 320 mm : 1 anti-tilt stainless steel perforated shelf as standard (max/shelf: 35 kg distributed). Maximum numbers of shelves : 8 (max total weight : 50 kg)
Ambient Temperature	From +18°C to +32°C
Environment	Indoor use only, not designed for use in explosive atmospheres (ATEX)
Warranty	2 years

### HEATING SYSTEM

System	Heating convection ensured by fan (no risk of conduction or radiation)
Ventilation	Turbine ventilation ensuring temperature homogeneity
Air renewal	Adjustable on the front, rear exhaust

### ELECTRIC AND ELECTRONIC DATA

Controller type	Electronic PID self regulating and self-adaptive programmable controller
Temperature probe	1 x Pt100 3 wires probe
List of alarms	High temperature / Overtemperature safety class II according to the European standard EN 61010-2-010 (DIN 3.1 equivalent)
Type of alarm	Visual
Energy consumption	750 W
Types of power supply	Voltage 230V ~ +/-10%, 50 Hz, Voltage 110V ~ +/-10%, 50/60Hz (on demand), Voltage 220V ~ +/-10%, 60Hz (on demand)

### PERFORMANCES (AMBIENT TEMPERATURE +22°C)

Temperature range	Amb + 5°C to 100°C, 1/10th degree display (set and actual temperature)
Temporal stability	+/-0.1°C
Homogeneity at 37°C	+/-0.5°C

### OPTIONS & CONFORMITIES

Options	<ul style="list-style-type: none"><li>• Base with or without 4 casters</li><li>• Key door lock</li><li>• Chart recorder</li><li>• Characterization 9 points according to EN60068-3-11</li><li>• Stainless Steel Perforated shelf</li><li>• Lowenstein trays</li><li>• Additional cable entry port</li></ul>
Supplied with	1 Shelf, 1 power cord & User manual
Certification / Conformities	Equipment meets the specifications and CE compliant to EN60068-3-11 • 2014/35/UE – Low voltage directive • 2014/30/UE – EMC directive, Class A device • 2014/68/UE – Under pressure devices
Shipping weight	54 kg / 119.1 lb
Shipping dimensions (W x D x H)	700 x 570 x 670 mm / 27.6 x 22.5 x 28.0 in.