Dolan-Jenner[®]

Fiber-Lite[®]

Model 3100 30 Watt Small-Footprint Illuminator

The 3100 is a light weight and compact 30 Watt quartz halogen illuminator with a remote plug-in-the-wall transformer. The light source uses an EKZ lamp, which provides upwards 10,000 footcandles of intense, cold illumination. The 3100 has a standard Dolan-Jenner nosepiece, which allows the interface of all Fiber-Lite standard and custom fiber optic light guides. Precise light level settings are obtained via the 4-position, solid state, intensity control switch.


The Model 3100 illuminator is typically used for co-axial illumination in microscopy applications. Available in either single gooseneck or ring light configurations, the Model 3100 is Dolan-Jenner's smallest footprint illuminator.

Ring light Systems

The Model 3100 Ring light systems provide high intensity uniform illumination at high magnifications and long working distances without light adjustments when refocusing or when zoom features are used. Eliminating the clutter and head radiation of conventional light sources and offering better uniformity than LED rings, the Model 3100 ring light system is the ideal solution where 360° of shadow free illumination is required.

Single Arm Systems

The Model 3100-1 "Gooseneck" system is a single arm assembly, featuring a self-supporting, flexible light guide assembly that allow users to position the lighting at an optimal angle of incident lighting. This system also includes the LH-759 focusing lenses to optimize the intensity to the spot where light is needed most. These qualities make the Model 3100-1 a very versatile system for supplying high intensity and cold illumination in both laboratory and harsh environments.

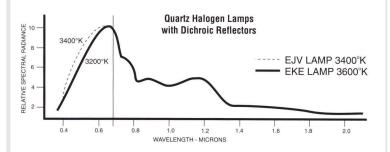



- Small, Compact Footprint
- Compatible with all Light Guides
- Lamp Life up to 10,000 Hours

Model 3100 Features:

- •Compact, Hard-Mountable to Specialty Equipment
- •10,000 Footcandles
- Intense, Cold Illumination
- 4-Position, Solid State Intensity Control
- Light Weight & Rugged, High-Impact Plastic Housing
- 2 Year Warranty

Configurations:

- 25mm ID accepts "SX" and "MX" series adapters
- Available in Single Gooseneck and Ring Light


Model 3100 30 Watt Small-Footprint Illuminator


Dolan-Jenner[®]

ORDERING INFORMATION

| Model & P/N | Description |
|---------------------------|---|
| 3100 002831000000 | 30 Watt Lamp, 115 V AC Illuminator |
| 3100-1 660000051001 | 30 Watt Lamp, 115 V AC Illuminator w/ BGG 1823 Single Gooseneck, (1) LH759 Focusing Lense, SX-10 ADAPTER |
| 3100-A37P 660000051004 | 30 Watt Lamp, 115 V AC Illuminator w/ A3739P Ring Light, SX-10 Adapter |

DIMENSIONS





| Performance Data | | | | | | |
|-----------------------|--|--|--|--|--|--|
| Lamp Output | 10,000 footcandles at fiber optic intersection plane | | | | | |
| Electrical Data | | | | | | |
| Input Voltage | 115 V AC, 60Hz | | | | | |
| Environmental Data | | | | | | |
| Operating Temp. | 5 - 40°C | | | | | |
| Cooling | Fan Cooled | | | | | |
| Physical Description | | | | | | |
| Dimension | 3″ x 4.5″ x 6.5″ | | | | | |
| Weight | 4.5 lbs. | | | | | |
| Intensity Control | 4-Position Solid State Switch | | | | | |
| Adapters | SX-type adapter series | | | | | |
| Lighting Properties | | | | | | |
| Lamp | 30 Watt, 10.8 V, Type EKZ qtz halogen | | | | | |
| Color Temp. | 3100º Kelvin | | | | | |
| Lamp Life | 200 hrs. full intensity 10,000 at min. intensity | | | | | |
| Fiber Optic Interface | 25mm (A Style) | | | | | |
| Certifications | | | | | | |
| None | | | | | | |

SYSTEMS







| | 3100-A37P | 3100-1 | 3100 |
|-------------------------------|---|--|---------|
| Fiber Optic Assembly Included | 60mm ID Ring Light with 36" Cable | Single Gooseneck with Focusing Lens | None |
| Fiber Optic Assembly | 0.55NA High Quality Glass Fibers (A3739P) | 0.55NA High Quality Glass Fibers (BGG1823) | None |
| Optional IR Filter Available | No | No | No |
| 61010 3rd Ed. Safety Rated | No | No | No |
| Warranty | 2 Years | 2 Years | 2 Years |