



More information on the website
radwag.com/en/info,w1,Z4X

PUE 7.1.62.HRP High Resolution Scale



PUE 7.1.62.HRP High Resolution Scale

The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

	PUE 7.1.62.HRP High Resolution Scale
Metrological parameters	
Maximum capacity [Max]	62 kg
Minimum load	25 g
Preload range	30 kg
Readability [d]	0,1 g
Tare range	-62 kg
Repeatability	0,08 g
Linearity	±0.4 g
Stabilization time	2 s
Adjustment	internal (automatic)
Physical parameters	
Display	5,7" Resistiv-Farb-Touchscreen
Weighing pan dimensions	500×400 mm
Device dimensions	500×400×180 mm
Packaging dimensions	610×710×275 mm
Net weight	30 kg
Gross weight	35 kg
Construction	
Protection class	IP 66/67 construction, IP 43 indicator
Construction	mild steel St3S
Weighing pan material	Stainless steel AISI304
Communication interface	
Communication interface	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	+10 ÷ +40 °C
Relative humidity	40% ÷ 80%

Repeatability is expressed as the standard deviation of ten load placements. Relative humidity under non-condensing conditions. Stabilization time under optimal environmental conditions.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Displays

Transponder card readers

RS 232 cables (scale - Ethernet)

RS 232 cables (scale - printer)

Barcode scanners

Label Printers

Receipt Printer

Additional Weighing platforms Module

RS 232 – USB Converter

Software

E2R System

Label Editor R02

R-LAB


RADWAG Development Studio

RAD-KEY

RADWAG Remote Desktop

Scales Editor 2.1

Device dimensions

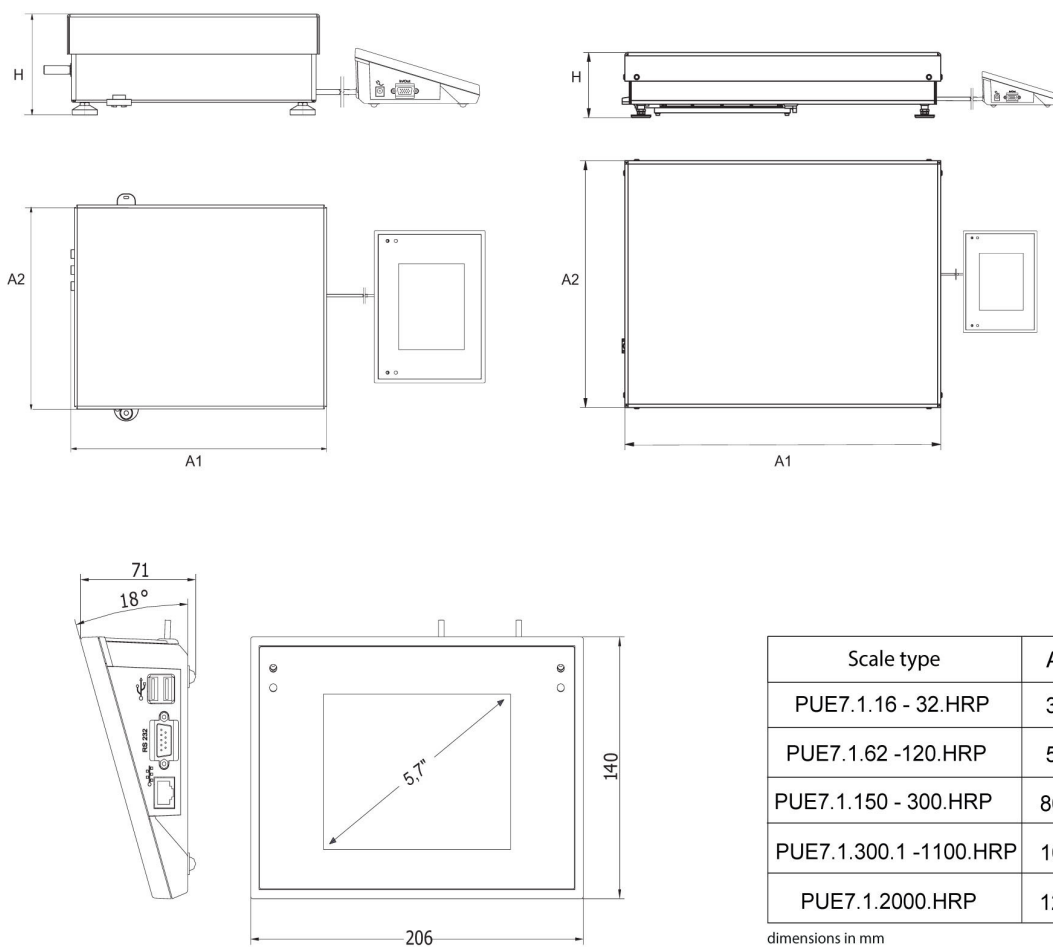

Scale type	A1	A2	H
PUE7.1.16 - 32.HRP	360	280	139±3
PUE7.1.62 -120.HRP	500	500	175±3
PUE7.1.150 - 300.HRP	800	600	175±3
PUE7.1.300.1 -1100.HRP	1000	800	175±3
PUE7.1.2000.HRP	1250	1000	175±3

dimensions in mm