70" Ductless Fume Hood

Model # SS-370-DCH

The **70" Wide Ductless Fume Hood** combines powerful air flow with a sturdy and compact enclosure for optimal respiratory and environmental protection. This fume hood helps protect the operator and environment from hazardous fumes or particulate generated from applications performed within the hood.

The **70" Ductless Fume Hood's** powerful fan directs fumes into the filter chamber containing high quality filter media selected depending on the application. Filter media choices include **HEPA** [up to 99.97% efficiency on particles 0.3 microns and larger], **ASHRAE** [up to 95% efficiency on particles 0.5 microns and larger, **Activated Carbon**, and **specialty-blended filtration** [*i.e. acid gas, mercury, aldehyde, and ammonia*].

Typical uses for the **70" Ductless Fume Hood** include chemical fumes, pharmaceutical compounding, soldering applications, dust removal, biological applications, and a variety of applications requiring fume and dust removal. The **70" Ductless Fume Hood** can provide an effective and economical solution for many commercial, medical, laboratory, and industrial applications. For additional visibility, a transparent version is available at extra cost.

Our line of ductless fume hoods is not intended for sterile compounding applications.





70" Ductless Fume Hood



70" DCH provides chemical fume control.



70" DCH can be fitted with dual blowers for increased airflow.

Product Features

- **Includes:** variable speed controller (115V only), clear anti-static vinyl curtains, velometer, and LED light
- Optional: Magnehelic Gauge and hour counter
- Standard Sizes: 12", 18", 24", 30", 40", 50", 60", and 70" (custom sizes available)




21221 FM 529 Rd, Cypress, TX 77433 1.800.799.4609 • sales@sentryair.com

www.sentryair.com

- Quiet operation
- Long filter life
- Simple, quick "no tool" filter change
- Portable and lightweight
- Reliable, low maintenance operation

Product Specifications

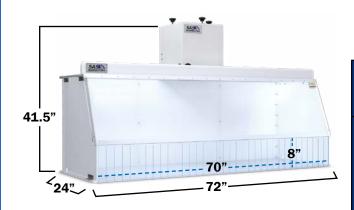

Shown with outer dimensions. Dimensions are approximate.



21221 FM 529 Rd Cypress, TX 77433 1.800.799.4609 sales@sentryair.com

www.sentryair.com

Hood Dimensions	Outer: 24" x 72" x 25"
(D x W x H)	Interior: 23.5" x 70" x 24"
(=,	Access Area: 8" x 70"
Hood Material	Sides: 0.25" white acrylic
	Base: 0.5" white high
	density polyethylene
	Top: 0.5" clear polycarbonate
	Front Window: 0.25"
	clear polycarbonate
Blower Dimensions	15.5"L x 13" W x 14.5" H
Biower Dimensions	16 Ga. carbon steel with
Blower Material	
Diuwer Material	polyester epoxy coating on all surfaces
Woidht	
Weight	155 lbs
Air Volume	350 CFM
(approximately)	(varies with filter media)
	Carbon Pre-filter + HEPA
	Filter – 100 FPM high,
Inlet Velocities on	25 FPM low
High (approximately)	Carbon Pre-filter + Heavy
	Duty Carbon Filter – 70 FPM high, 20 FPM low
	115/1/60, 2 amps
Electrical	220/1/50, 0.75 amps
	8' grounded power cord
	with NEMA 5-15P plug
Sound Level	61 to 66 dba (low to high)
Maximum	Operating temperature
Temperature	not to exceed 170° F
	HEPA (up to 99.97%
Main Filter	efficient on particles
	down to 0.3 microns)
	ASHRAE (up to 95%
	efficient on particles
	down to 0.5 microns)
Options	down to 0.5 microns) Activated Carbon
	Activated Carbon
	Activated Carbon Specialty-Blended Filter
	Activated Carbon Specialty-Blended Filter Media (i.e. acid gas,
	Activated Carbon Specialty-Blended Filter Media (i.e. acid gas, mercury, aldehyde, and
Options	Activated Carbon Specialty-Blended Filter Media (i.e. acid gas, mercury, aldehyde, and ammonia) Limited two-year warranty from date of shipment on
	Activated Carbon Specialty-Blended Filter Media (i.e. acid gas, mercury, aldehyde, and ammonia) Limited two-year warranty from date of shipment on defects due to materials
Options	Activated Carbon Specialty-Blended Filter Media (i.e. acid gas, mercury, aldehyde, and ammonia) Limited two-year warranty from date of shipment on

