


Bio Static Performance

BSP65 Incubator

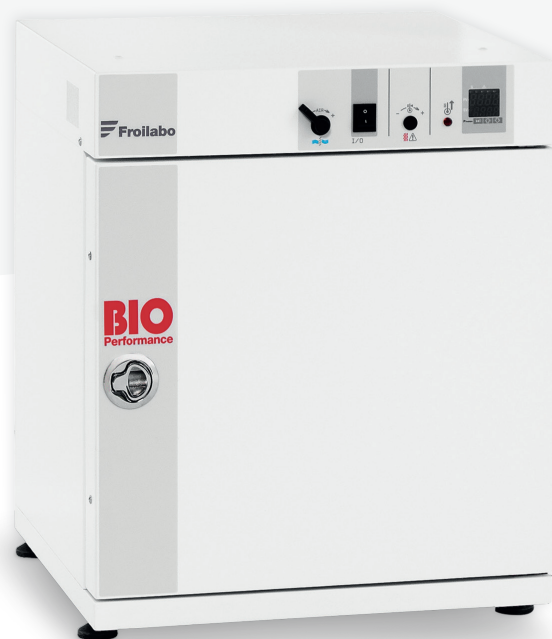

Precise and Homogenous.

Accurate and durable laboratory incubators with natural or forced convection available with or without refrigeration. Froilabo's range of laboratory incubators provide flexible solutions suited to a variety of applications. Supporting capacities from 60 litres to 1,300 litres they are suitable for large and small laboratories.

PERFORMANCE (Ambient temp: 22°C)

Temperature range	+7°C to 65°C
Homogeneity at 37°C	<+/-1°C
Temporal stability	<+/-0.2°C

WARRANTY

Parts	2 years
-------	---------



Class II

Overtemperature Safety



8 mins

To rise from 18°C to 60°C

Technical Specifications

BSP65 LABORATORY INCUBATOR

GENERAL SPECIFICATIONS

Net Volume	61 L
Ext Dimension (W x D x H)	526 x 579.5 x 640 mm
Int Dimension (W x D x H)	400 x 394 x 390 mm
Ext Construction	Electrogalvanised steel with epoxy paint
Int Construction	Brushed stainless steel inner tank
Net Weight	39 kg
Standard Construction	1 fully closed door, easy hands-free closure / Safety glass inner doors for better insulation / 1 power cord (1.5m) / 4 levelling feet
Shelves (W x D)	380 x 320 mm : 1 anti-tilt stainless steel perforated shelf as standard (max/shelf: 35 kg distributed). Maximum numbers of shelves : 8 (max total weight : 50 kg)
Ambient Temperature Environment	From +18°C to +32°C
Warranty	Indoor use only, not designed for use in explosive atmospheres (ATEX) 2 years

HEATING SYSTEM

System	Preheated chamber (prevent desiccation)
Ventilation	Natural convection
Air renewal	20 cm free at the back

ELECTRIC AND ELECTRONIC DATA

Controller type	Electronic PID self regulating and self-adaptive programmable controller
Temperature probe	1 x Pt100 3 wires probe
List of alarms	High temperature / Overtemperature safety class II according to the European standard EN 61010-2-010 (DIN 3.1 equivalent)
Type of alarm	Visual
Energy consumption	300 W
Types of power supply	Voltage 230V ~ +/-10%, 50 Hz/ Voltage 110V ~ +/-10%, 50/60Hz (on demand)/ Voltage 220V ~ +/-10%, 50Hz (on demand)

PERFORMANCES (AMBIENT TEMPERATURE +22°C)

Temperature range	Amb + 7°C to 65°C, 1/10th degree display (set and actual temperature)
Temporal stability	+/- 0.2°C
Homogeneity at 37°C	+/- 1°C

OPTIONS & CONFORMITIES

Options	<ul style="list-style-type: none">• Base with or without 4 casters• Key door lock• Chart recorder• Characterization 9 points according to EN60068-3-11• Stainless Steel Perforated shelf• Lowenstein trays• Additional cable entry port
Supplied with	1 Shelf, 1 power cord & User manual
Certification / Conformities	Equipment meets the specifications and CE compliant to EN60068-3-11 • 2014/35/UE – Low voltage directive • 2014/30/UE – EMC directive, Class A device • 2014/68/UE – Under pressure devices
Shipping weight	54 kg
Shipping dimensions (W x D x H)	590 x 730 x 800 mm